

U.K. Mainland Distributor

TAPE MUSIC LOUDSPEAKERS LIMITED

114 Ashley Road, St. Albans, Herts. AL1 5JR
Tel: St. Albans (STD 0727) 64337 Telex: 248474


Export Distributor

BRITISH HI-FI EXPORTS LIMITED

P.O. Box 86, St. Julian's Court
St. Peter Port, Guernsey, Channel Islands.
Tel: (STD 0481) 26521 Telex: 41110

Local Distributor

This product is made in England

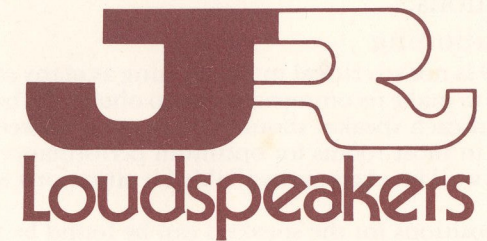

Instructions

You have chosen a product which has many unconventional and new design features incorporated and in order to obtain many years of exciting listening please take a moment to read these instructions.

Speaker Positioning

The JR 149 is not so critical in positioning as many conventional designs but we are able to make recommendations to obtain the best performance. We recommend that each speaker should be mounted between 2 feet and 3½ feet from the floor in most rooms for optimum performance. Bookshelf mounting is ideal but wall brackets are available for situations where shelves are not practical.

The best positions for the speakers can be found by trial and error since room acoustics vary. Nevertheless, we believe that placing the speakers very close to room corners should be avoided in most instances as this may emphasise the upper bass.

Speaker Lead

A 3-metre lead with DIN plug will be found inside the aluminium base of the speaker. By unscrewing the central knurled nut in the centre of the base the aluminium housing can be removed to expose the lead. Care should be taken not to damage the cross-over network components protected by the base cover, which are specially mounted in this section so that they are not contained in the sound chamber of the speaker. This avoids any possibility of vibrating components affecting the clean undisturbed sound. Remove the free end of the coil of lead which is terminated in the DIN plug, taking care to fit the grommet on the lead to the slot in the aluminium base provided. This slot should be positioned in line with the extrusion at the back of the speaker where the Declon foam terminates. This will bring the JR logo to the front, in line with the axis of the loudspeaker units.

Note: Positive or negative lead may be connected to left or right terminal, but whichever is chosen on one speaker should be maintained on the other to ensure correct phase. If the original lead supplied is undisturbed then there is no possibility of incorrect phasing by reason of the fact that the DIN plug can only be inserted one way round in the amplifier.

Cleaning

The Declon foam grille wrapped around the speaker is washable and may be removed by pulling away from the Velcro fastening at the back. Upon refitting the foam, care should be taken not to stretch it whilst wrapping it around, otherwise it will be oversized and give an uneven contour.

Listening Enjoyment

You will experience a new dimension in listening pleasure due to the basic design features of this loudspeaker. There is an openness of sound that you will sense immediately.

Warranty

We will quite simply correct any manufacturing faults free of labour and parts at any time. If a part fails through inherent manufacturing fault, rather than through normal wear or improper use, then we will remedy or replace it at our discretion.

Thank you.